



# *Limitorque MX and QX Valve Actuators*

Next-generation electronic actuators



*Experience In Motion*



## ***Flowserve Limitorque Actuation Systems***

Limitorque is an operating unit of Flowserve, a \$4 billion-plus company strongly focused on automation and support of the valve industry. Introduced in 1929, Limitorque has 80-plus years of experience in actuating every type of valve.

- Proven history as an industry leader and innovator
- 240,000-square-foot manufacturing and assembly facility in Lynchburg, VA, USA
- Global quick response centers in Houston, TX; Suzhou, China; Bangalore, India; and Newbury, UK
- Global service network of factory-trained technicians provides excellent after-sales support
- Complete range of products:
  - Multi-turn products up to 18,000 ft-lb of torque and 500,000 lb of thrust
  - Quarter-turn products up to 614,000 ft-lb of torque
- Low maintenance, high reliability, durability and long-life actuators that translate into low cost of ownership
- Complete and competitive valve control solutions for all industries



## ***State-of-the-art Actuation***

The Flowserve Limitorque QX quarter-turn and MX multi-turn electronic valve actuators lead the industry in quality, safety and ease of use.


The MX included innovations that were market firsts when introduced, and the latest MX and QX models have improved on these while adding to the list:

- Non-intrusive design employs selection knobs with solid-state Hall-effect devices instead of reed switches that can fail with age and vibration
- Non-contacting absolute encoders for accurate position sensing.
- Batteries are not required for the absolute encoder to retain position data in the event of loss of main power thus eliminating the need for costly battery maintenance programs or the potential loss of equipment availability due to battery failure
- The absolute encoder includes redundant position sensors and comparator logic for increased reliability and safety
- Limigard technology uses internal logic to compare with external commands to prevent actuator malfunctions using a Fail/No Action philosophy
- Graphical display for access to operational data in 10 languages
- Optional Bluetooth® wireless connectivity



The QX and MX provide the user with predictable, reliable and safe operation for years to come, in the most rigorous applications and extreme environments.

## MX Multi-turn Actuator\*

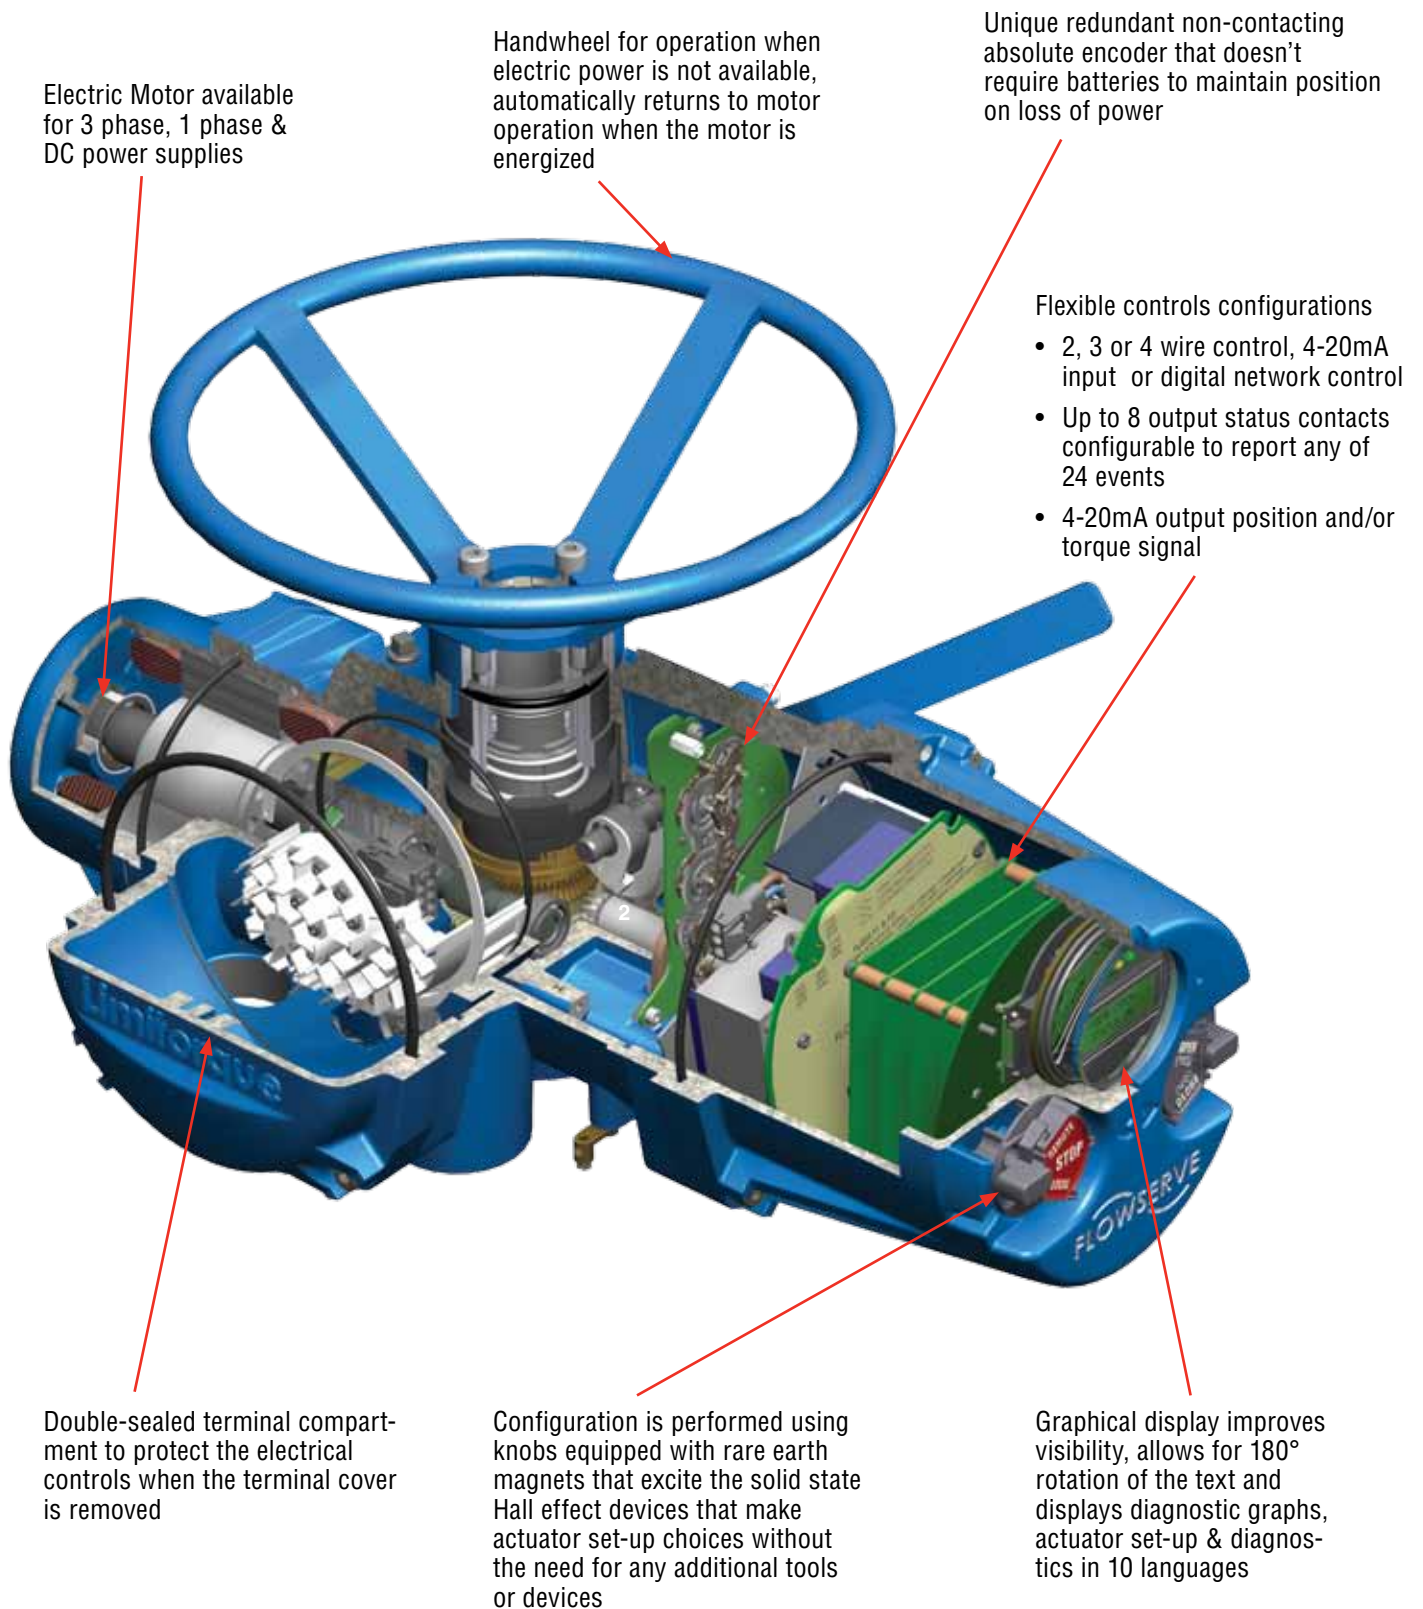

## Limitorque QX Quarter-turn and QXM Multi-turn Actuator\*\*

Double-sealed terminal compartment to protect the electrical controls when the terminal cover is removed

Advanced brushless DC motor that supports most global voltages - single phase and three phase AC and 24-250 VDC

Handwheel for operation when electric power is not available, automatically returns to motor operation when the motor is energized

Adjustable Mechanical Stops for quarter turn applications

A redundant absolute encoder that is accurate to 1/10th of one degree resolution of output rotation

Graphical display improves visibility, allows for 180° rotation of the text and displays diagnostic graphs, actuator set-up & diagnostics in 10 languages

Configuration is performed using knobs equipped with rare earth magnets that excite the solid state Hall Effect devices that make actuator set-up choices without the need for any additional tools or devices

Flexible controls configurations

- 2, 3 or 4 wire control, 4-20mA input or digital network control
- Up to 8 output status contacts configurable to report any of 24 events
- 4-20mA output position and/or torque signal

\* For more information, refer to the MX sales brochure, LMENBR2302.  
\*\* For more information, refer to the QX sales brochure, LMENBR3302.

## ***MX and QX Network Communications***

The MX provides a comprehensive network option portfolio to the User. Network solutions are improved with the addition of DeviceNet to complement Modbus, Foundation Fieldbus H1, Profibus DP\_V1 and Profibus PA. MX provides the User with predictable, reliable and safe operation for years to come, in applications that are subject to the most rigorous requirements and environmental extremes.

### ***DDC (Distributed Digital Control) Modbus Communication***

DDC is Flowserve Limatorque's digital communication control system that provides the ability to control and monitor up to 250 actuators over a single twisted-pair cable. The communication network employs Modbus protocol on an RS-485 network and is redundant. The field unit also communicates all actuator status and alarm diagnostic messages over the same communication network.

#### **DDC Network**

- Single-ended loop (consult factory)
- Modbus protocol
- High speed – up to 19.2 k baud

### ***Foundation Fieldbus communication with Device Type Manager (DTM) technology***

The MX and QX can be fitted with Foundation Fieldbus protocol that complies with the IEC 61158-2 Fieldbus H1 standard. The field unit device is able to support several topologies such as point-to-point, bus with spurs, daisy chain, tree or a combination of these

### ***Profibus DP V1 communication with DTM***

The MX and QX can be fitted with Profibus DP\_V1 protocol field units that comply with EN50170 Fieldbus Standard for RS-485 communications. The device supports several topologies such as point-to-point, bus with spurs, daisy chain, tree or a combination of these. The DTM supports Flowserve's ValveSight diagnostic engine.

### ***Profibus PA communication with DTM***

A Profibus PA protocol is available and complies with EN50170 Fieldbus Standard and Fieldbus physical layer per IEC 61158-2 for communications. The device supports several topologies such as point-to-point, bus with spurs, daisy chain, tree or a combination of these.

### ***DeviceNet***

DeviceNet complies with CAN-based protocol.

### ***Master Station III***

MX and QX units equipped with DDC can be controlled via Flowserve Limatorque's Master Station III. It includes:

- Host interface – Industry-standard Modbus Rtu, ASCII, UDP, and TCP/IP protocols and control
- 5.6" TFT touch-screen display for network configuration status
- Configurable polling sequence priority
- Network time protocol for time synchronization of alarms/ diagnostics data to host device
- Modular hot-swappable redundant design
- E-mail notifications of alarm conditions
- Data/event logging



## Truly Global Designs

The QX and MX actuators have been tested to demonstrate compatibility with an extensive list of US, Canadian, EU and IEC regulations, allowing use in the harshest conditions found in applications anywhere in the world.

IEC	MILSTD
IP68	IEEE
NEMA	EN
FM	ANSI/ISA
ATEX EExd	EMC
CENELEC	CSA
CE	ASTM

For more information on the features, options and certifications of the Limitorque MX, consult Flowserve bulletin LMENBR2302 and for the QX, consult bulletin LMENBR3302.

### Flowserve Corporation Flow Control

#### United States

Flowserve Limitorque  
5114 Woodall Road  
P.O. Box 11318  
Lynchburg, VA 24506-1318  
Phone: 434-528-4400  
Facsimile: 434-845-9736



#### England

Flowserve Limitorque  
Euro House  
Abex Road  
Newbury  
Berkshire, RG14 5EY  
United Kingdom  
Phone: 44-1-635-46999  
Facsimile: 44-1-635-36034

#### Japan

Limitorque – Nippon Gear Co., Ltd.  
NOF Bldg. 9th Floor  
1-11-11, Kita-Saiwai, Nishi-Ku  
Yokohama (220-0004)  
Japan  
Phone: 81-45-326-2065  
Facsimile: 81-45-320-5962

#### Singapore

Flowserve Limitorque  
12, Tuas Avenue 20  
Singapore 638824  
Phone: 65-6868-4628  
Facsimile: 65-6862-4940

#### China

Limitorque Beijing, Pte., Ltd.  
RM A1/A2  
22/F, East Area, Hanwei Plaza  
No. 7 Guanghua Road, Chaoyang District  
Beijing 100004, Peoples Republic of China  
Phone: 86-10-5921-0606  
Facsimile: 86-10-6561-2702

#### India

Flowserve Limitorque, Ltd.  
Plot No 4  
Export Promotional Industrial Park  
Whitefield, Bangalore 560066  
India  
Phone: 91-80-40146200  
Facsimile: 91-80-28410286

FCD LMENBR0008-00 Printed in USA.

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© 2011 Flowserve Corporation, Irving, Texas, USA. Flowserve is a registered trademark of Flowserve Corporation.

